

Secure peripheral switching solutions.

Secure. Certified. Connected.





The solution.

Belkin offers the latest Common Criteria NIAP Protection Profile 4.0-certified peripheral sharing devices designed to maintain air-gap isolation with the desktop while improving operator efficiency and effectiveness.

The ultimate security solution.

All Belkin secure switching products are equipped with advanced cybersecurity provisions including:

- Optical data diodes assuring unidirectional data flow from each peripheral.
- Device emulation and filtering of connected USB devices.
- Secured EDID emulation ensuring protection of connected monitors.

Tamper-proof system.

All Belkin secure switching products are equipped with an end-to-end tamper-proof system including:

- A holographic security tamper-evident label on the switch enclosure to indicate if the product has been opened or compromised.
- Universal 2nd Gen SKVMs include an always-on, battery-backed, active anti-tamper circuit that protects the unit while in transit and after deployment.
- Universal 2nd Gen SKVM ships in security taped packaging, ensuring anti-tamper protection in transport from the factory to the end site.

Modular Secure KVM (SKVM) series.



Belkin's Modular SKVM series is designed and built for government and military agencies around the world to safeguard critical data and computer systems. While only slightly larger than a modern smartphone, Belkin's Modular SKVMs and SKMs meet all critical security constructs to ensure air-gap isolation and system security in the smallest form factor on the market. Universal video compatibility, innovative mounting options, and an included remote control allow administrators to declutter the operator's desk without jeopardizing control and access.

- Smallest form factor for 2-, 4- or 8-port SKVM.
- Universal video compatibility.
- Included remote control supports SKVM switching while decluttering the desk.
- Optional mounting hardware supports VESA, cubicle and under-the-desk mounting.
- Certified for NIAP Protection Profile 4.0 to meet the highest security standards.
- TAA compliant, assembled in the USA.
- Dedicated US-based free technical support.



2-Port Single-Head Modular SKVM Switch Base Unit PP4.0 w/Remote
FIDN102MOD-BA-4



2-Port Dual-Head Modular SKVM Switch Base Unit PP4.0 w/Remote
FIDN202MOD-BA-4



4-Port Single-Head Modular SKVM Switch Base Unit PP4.0 w/Remote
FIDN104MOD-BA-4



4-Port Dual-Head Modular SKVM Switch Base Unit PP4.0 w/Remote
FIDN204MOD-BA-4



8-Port Single-Head Modular SKVM Switch Base Unit PP4.0 w/Remote
FIDN108MOD-BA-4




8-Port Dual-Head Modular SKVM Switch Base Unit PP4.0 w/Remote
FIDN208MOD-BA-4

Free up your desk.

With a 94% smaller footprint than other SKVMs, the Modular SKVM series is designed to take up as little desk space as possible while adhering to NIAP PP PSD 4.0 requirements.

Optional mounting choices and the included remote control combine to help declutter the desk while enhancing operator ergonomics in even the most cramped work environments.

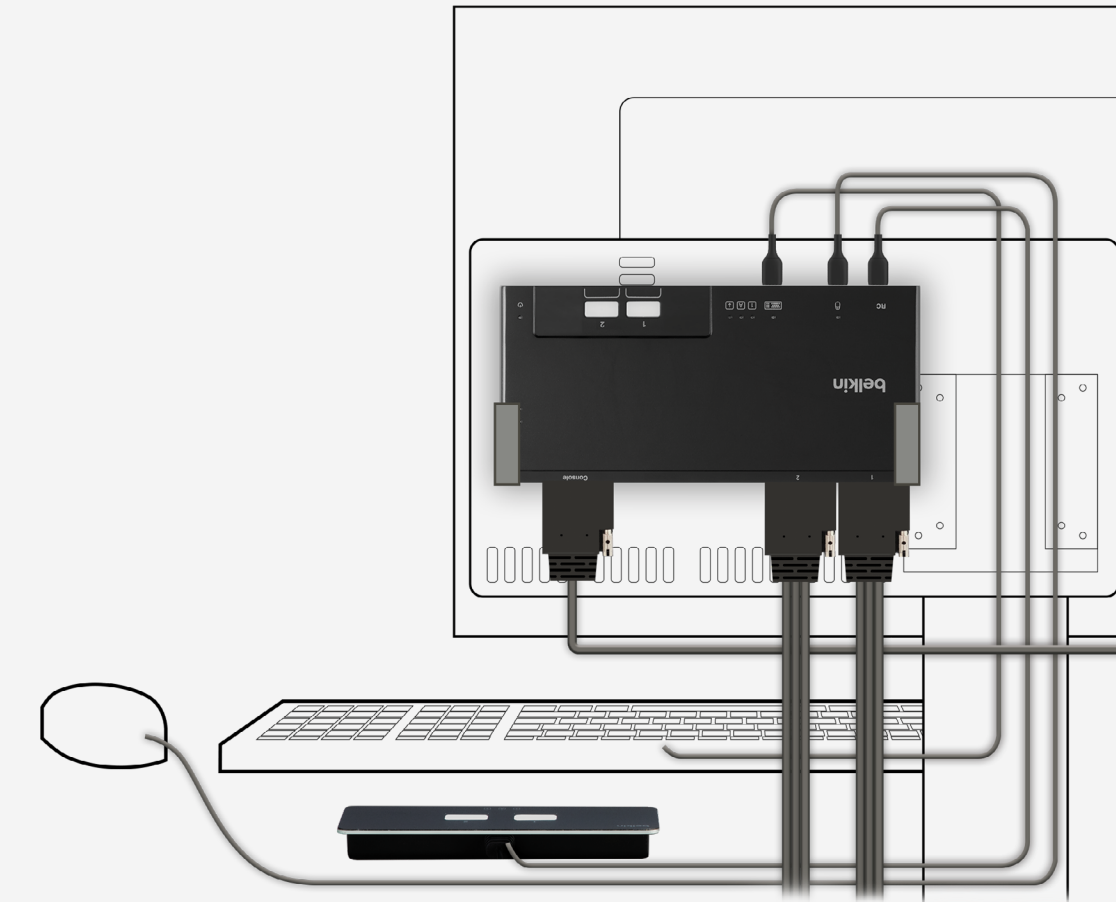

Modular SKVMs

Modular SKVM															
Part Number	FIDN102 MOD-PP-4 (DisplayPort)	FIDN202 MOD-PP-4 (DisplayPort)	FIDN104 MOD-PP-4 (DisplayPort)	FIDN204 MOD-PP-4 (DisplayPort)	FIDN102 MOD-DD-4 (DVI)	FIDN202 MOD-DD-4 (DVI)	FIDN104 MOD-DD-4 (DVI)	FIDN204 MOD-HH-4 (HDMI)	FIDN102 MOD-HH-4 (HDMI)	FIDN202 MOD-HH-4 (HDMI)	FIDN104 MOD-HH-4 (HDMI)	FIDN204 MOD-HH-4 (HDMI)	FIDN108 MOD-BA-4 (SKVM w/o cables)	FIDN208 MOD-BA-4 (SKVM w/o cables)	
No. of Computers	2	2	4	4	2	2	4	4	2	2	4	4	8	8	
No. of Displays	1	2	1	2	1	2	1	2	1	2	1	2	1	2	
Console Ports (Devices)															
Console Mouse and Keyboard Ports	USB Type-A female connector (1 designated port for mouse and 1 designated port for keyboard) with status indicator lights														
Console Remote Control Port	USB Mini (female)														
Console Video Port	DisplayPort						HDMI						HDMI		
Integrated Console Cable	1x 6 ft. (1.8m) single-monitor integrated video cable	1x 6 ft. (1.8m) dual-monitor integrated video cable	1x 6 ft. (1.8m) single-monitor integrated video cable	1x 6 ft. (1.8m) dual-monitor integrated video cable	1x 6 ft. (1.8m) single-monitor integrated video cable	1x 6 ft. (1.8m) dual-monitor integrated video cable	1x 6 ft. (1.8m) single-monitor integrated video cable	1x 6 ft. (1.8m) dual-monitor integrated video cable	1x 6 ft. (1.8m) single-monitor integrated video cable	1x 6 ft. (1.8m) dual-monitor integrated video cable	1x 6 ft. (1.8m) single-monitor integrated video cable	1x 6 ft. (1.8m) dual-monitor integrated video cable	Optional cables to provide DP, DVI, HDMI, mDP, VGA		
Max Resolution Supported	3840 x 2160 pixels (UHD 4K) @ 30Hz														
Computer Ports															
Computer Keyboard/Mouse Port	USB Type-A														
Computer Video Port	DisplayPort						HDMI						HDMI		
Integrated Computer Cable	2x 6 ft. (1.8m) integrated cables for video and USB		4x 6 ft. (1.8m) integrated cables for video and USB		2x 6 ft. (1.8m) integrated cables for video and USB		4x 6 ft. (1.8m) integrated cables for video and USB		2x 6 ft. (1.8m) integrated cables for video and USB		4x 6 ft. (1.8m) integrated cables for video and USB		Optional cables to provide DP, DVI, HDMI, mDP, VGA, USB-C w/USB to support keyboard, video and mouse		
Physical															
Dimensions	3.5 (W) x 7.5 (D) x 0.6 (H) in. / 90 (W) x 190 (D) x 15 (H) mm (unit w/o cables)												2.7 (W) x 0.68 (H) X 12.89 (L) in. / 69 (W) x 17 (H) X 327 (L) mm		
Weight	0.55 lbs. (0.25kg.) (unit w/o cable)												1.09 lbs. (0.494kg.)		
Power															
Power Requirements	12V, 2.5A DC														
AC Input	100-240VAC														
Power Type	External with WW mains connectors														
Environmental															
Operating Temperature	32° to 104° F (0° to 40° C)														
Storage Temperature	-4° to 140° F (-20° to 60° C)														
Humidity Storage and Use	0-80% RH, non-condensing														
Certification															
Security Accreditation	NIAP Protection Profile PSD Ver. 4.0, Audio Input v 1.0. Keyboard/Mouse v 1.0. Video/Display v 1.0 TEMPEST variants available via an SDIP-55 NATO accredited TEMPEST test facility.														
Regulatory Compliance	FCC Class A, CE, UL, ICES, RCM, RoHS, UKCA														
General Information															
Made In	Designed in California. Assembled in USA with USA-based technical support (TAA compliant).														
Product Life Cycle	5 years														
Warranty	3 years standard (upgradeable to 4 or 5 years)														
Enclosure	Diecast aluminum														

Accessories Modular SKVMs

Modular SKVM Replacement Parts			
0401-00811	FIDN-MOD-REM2	FIDN-MOD-REM4	FIDN-MOD-REM8
Modular SKVM/SKM Power Adapter 12V 2.5A, w/Interchangeable Mains Connector Wall Mount	Modular SKVM/SKM Replacement Remote Control, 2-Port	Modular SKVM/SKM Replacement Remote Control, 4-Port	Modular SKVM Replacement Remote Control, 8-Port
Modular SKVM Accessories			
FIDN-WSMOUNT	FIDN-MOD-VMOUNT	FIDN-MOD-MOUNT	FIDN008KBD
SKVM/SKM Work-Surface Mount	Modular SKVM/SKM VESA Mount	Modular SKVM/SKM Under-Desk Mount	SKVM Remote Control w/Integrated Keyboard

Modular Secure KM (SKM) series.



Supporting two or four computers, the Belkin Modular SKM series is ideal for desktops that require multiple monitors for real-time monitoring and response.

Each computer remains directly connected to its own monitor or monitors while the SKM switches USB keyboard and mouse control with a simple keyboard key press and cursor move to the active display. Modular SKM units are shipped with a complete set of connecting cables and a remote-control unit, should a user desire a button push to switch the keyboard and mouse to a different computer.

- Smallest form factor for 2- or 4-port SKM.
- Included remote control supports SKM control switching while decluttering the desk.
- Optional mounting hardware supports VESA, cubicle, and under-the-desk mounting.
- Certified for NIAP Protection Profile 4.0 to meet the highest security standards.
- TAA compliant, assembled in the USA.
- Dedicated, USA-based free technical support.

Modular SKMs

Modular SKM		
Part Number	FIDN002MOD-KM-4	FIDN004MOD-KM-4
No. of Computers	2	4
No. of Displays	Up to 8	Up to 16
Console Ports (Devices)		
Console Mouse and Keyboard Ports	USB Type-A female connector (1 designated port for mouse and 1 designated port) for keyboard with status indicator lights	
Console Remote Control Port	USB Mini (female)	
Console Video Port	None	
Max Resolution Supported	N/A	
Computer Ports		
Computer Keyboard/Mouse Port	USB Type-A	
Computer Video Port	None	
Integrated Computer Cable	2x 6 ft. (1.8m) integrated cables for USB	4x 6 ft. (1.8m) integrated cables for USB
Physical		
Dimensions	3.5 (W) x 7.5 (D) x .6 (H) in. / 90 (W) x 190 (D) x 15 (H) mm (unit wo/ cables)	
Weight	3.9 lbs.(1.77 kg.) (unit w/o cables)	
Power		
Power Requirements	12V, 2.5A DC	
AC Input	100-240VAC	
Power Type	External with WW mains connectors	
Environmental		
Operating Temperature	32° to 104° F (0° to 40° C)	
Storage Temperature	-4° to 140° F (-20° to 60° C)	
Humidity Storage and Use	0-80% RH, non-condensing	
Certification		
Security Accreditation	NIAP Protection Profile PSD Ver. 4.0, Keyboard/Mouse v 1.0. TEMPEST variants available via an SDIP-55 NATO accredited TEMPEST test facility.	
Regulatory Compliance	FCC Class A, CE, UL, ICES, RCM, RoHS, UKCA	
General Information		
Made In	Designed in California. Assembled in USA with USA-based technical support (TAA compliant).	
Product Life Cycle	5 years	
Warranty	3 years standard (upgradeable to 4 or 5 years)	
Enclosure	Diecast aluminum	

Accessories Modular SKMs


Modular SKM Accessories			
FIDN-MOD-VMOUNT	FIDN-MOD-MOUNT	FIDN008KBD	
Modular SKVM/SKM VESA Mount	Modular SKVM/SKM Under-Desk Mount	SKVM Remote Control w/Integrated Keyboard	
Modular SKM Replacement Parts			
0401-00811	FIDN-MOD-REM2	FIDN-MOD-REM4	FIDN1MOD-USB-06
Modular SKVM/SKM Power Adapter 12V 2.5A, w/Interchangeable Mains Connector Wall Mount	Modular SKVM/SKM Replacement Remote Control, 2-Port	Modular SKVM/SKM Replacement Remote Control, 4-Port	Modular USB Cable for SKM, 6 ft. (1.8m)

Universal 2nd Generation Secure KVM (SKVM) series.



Belkin's Universal 2nd Gen SKVM series combines cutting-edge cybersecurity provisions, video performance and user experience to deliver a no-compromise solution for the most demanding applications. Compatible with the SKVM Remote Control with Integrated Keyboard, the 2nd Gen SKVM combines channel selection with a backlit, mechanical USB keyboard to reduce operator error while decluttering the operator's desktop.

- Available in 2-, 4-, 8- and 16-channel ports with a choice of single or dual monitors for 1-8 port models, single monitor for 16-port model.
- Future-proof design supports current and upcoming video standards at up to 4K@60Hz with optional passive and active TAA-compliant cables.
- Optional SKVM remote with integrated keyboard supports full SKVM switching control for the ultimate operator experience.
- Certified for NIAP Protection Profile 4.0 to meet the highest security standards.
- USA-based free technical support.
- On some models, dedicated Common Access Card input ports consolidate the number of CAC readers and allow a single reader to be shared across all connected systems for user authentication.

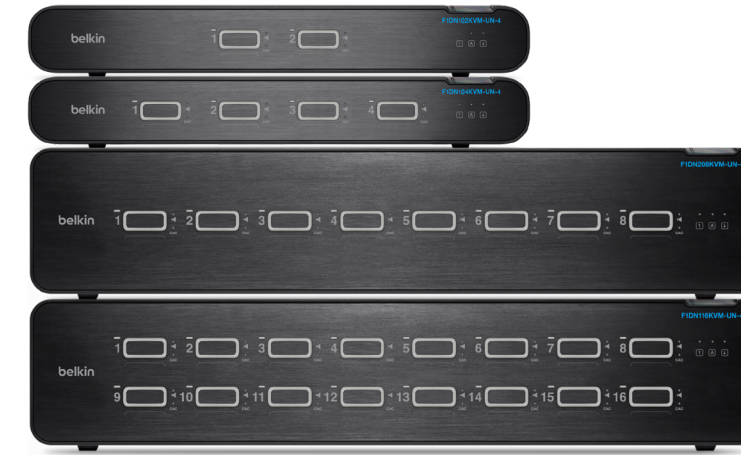

Front of Universal 2nd Generation SKVMs



Rear of Universal 2nd Generation SKVMs



The color of efficiency.

Customizable port coloring and naming on the front panel of the Universal 2nd Generation SKVM facilitates channel identification and reduces operator errors.



Control the SKVM from the keyboard.

The industry-first SKVM Remote Control with Integrated Keyboard provides full control of Belkin's Universal 2nd Generation and Modular SKVMs. This allows the SKVM to be located off the desk for a clean and decluttered workstation. The keyboard's LED backlighting and status indicators mimic the front-panel configuration of the SKVM to enhance operator channel and enclave awareness.

Universal 2nd Gen SKVMs

Universal 2nd Gen SKVM												
Part Number	FIDN102 KVM-UN-4 (W/CAC)	FIDN102 KVM-UNN4	FIDN202 KVM-UN-4 (W/CAC)	FIDN202 KVM-UNN4	FIDN104 KVM-UN-4 (W/CAC)	FIDN104 KVM-UNN4	FIDN204 KVM-UN-4 (W/CAC)	FIDN204 KVM-UNN4	FIDN108 KVM-UN-4 (W/CAC)	FIDN208 KVM-UN-4 (W/CAC)	FIDN116 KVM-UN-4 (W/CAC)	
No. of Computers	2	2	2	2	4	4	4	4	8	8	16	
No. of Displays	1	1	2	2	1	1	2	2	1	2	1	
CAC/Audio Freeze	Yes	No	Yes	No	Yes	No	Yes	No	Yes	Yes	Yes	
Front Panel Illumination / Multi Color	Yes											
Belkin SKVM Remote Control with Integrated Keyboard Compatible	Yes										No	
Console Ports (Devices)												
Console Mouse and Keyboard Ports	USB Type-A female connector (1 designated port for mouse and 1 designated port for keyboard) with status indicator lights											
Console Audio Jack	1/8 (3.5mm) female											
Console Remote Control Port	RJ14 female											
Console CAC/DPP Port	USB Type-A female connector											
Console Video Port	DisplayPort/HDMI combo connector											
Max Resolution Supported	3840 x 2160 pixels (UHD 4K) @ 60Hz - 2560 x 1600 pixels @ 120Hz											
Computer Ports												
Computer Audio Jack	1/8 (3.5mm) female											
Computer Keyboard/Mouse Port	USB Type-B											
Computer Video Port	DisplayPort/HDMI combo connector											
Physical												
Dimensions	12.5 (W) x 6.2 (D) x 1.7 (H) in. / 317.5 (W) x 162.6 (D) x 43.2 (H) mm						12.5 (W) x 6.2 (D) x 3.6 (H) in. / 317.5 (W) x 162.6 (D) x 91.4 (H) mm		17.2 (W) x 1.6 (H) x 8.1 (D) in. / 436.9 (W) x 40.6 (H) x 205.7 (D) mm	17.2 (W) x 3.5 (H) x 8.1 (D) in. / 436.9 (W) x 88.9 (H) x 205.7 (D) mm	17.2 (W) x 3.8 (H) x 8.1 (D) in. / 436.9 (W) x 88.9 (H) x 205.7 (D) mm	
Weight	3.9 lbs. (1.77kg.)						4.85 lbs. (2.2kg.)		9.8 lbs. (4.4kg.)	13.07 lbs. (5.9kg.)	13.76 lbs. (6.24kg.)	
Power												
Power Requirements	12VDC, 2.5A								12V, 4.0A DC			
AC Input	100-240VAC											
Power Type	External with WW mains connectors								Internal with WW mains connectors on power cord			
Environmental												
Operating Temperature	32° to 104° F (0° to 40° C) for video and USB											
Storage Temperature	-4° to 140° F (-20° to 60° C)											
Humidity Storage and Use	0-80% RH, non-condensing											
Certification												
Security Accreditation	NIAP Protection Profile PSD Ver. 4.0, Audio Input v 1.0. Keyboard/Mouse v 1.0. Video/Display v 1.0 User Authentication (by model), TEMPEST variants available via an SDIP-55, NATO accredited TEMPEST test facility.											
Regulatory Compliance	FCC Class A, CE, UL, ICES, RCM, RoHS, UKCA											
General Information												
Made in	Designed in California. Assembled in USA with USA-based technical support (TAA compliant).											
Product Life Cycle	5 years											
Warranty	3 years standard (upgradeable to 4 or 5 years)											
Enclosure	Extruded aluminum								Formed steel			

Accessories Universal 2nd Gen SKVMs

Universal 2nd Gen SKVM Accessories				
FIDN008KBD	FIDN-DCUAP-UN-4	FIDN-DCUA8-UN-4	FIDN002R	FIDN003R
SKVM Remote Control w/Integrated Keyboard	PP4.0 SKVM to DCU Adapter for 2- and 4-Port	PP4.0 SKVM to DCU Adapter for 8-Port	4-Button DCU for 4-Port SKVM Switches, with LCD Display	3 Button DCU for 4-16 Port SKVM Switches, with LCD Display
FIDN-KVM-EXTC6	FIDN-KVM-EXRC6	FIDN-KVM-EXTC6X	FIDN-KVM-EXRC6X	FIDN-KVM-EXTFI
KVM Host Side CAT6 Extender - Universal Video	KVM Console Side CAT6 Extender - Universal Video	KVM Host Side CAT6 Extender - Universal Video	KVM Console Side CAT6 Extender - Universal Video	KVM Host Side Fiber Extender - Universal Video
FIDN-KVM-EXRFI	FIDN-USB-XTRC	FIDN-MOD-REM2	FIDN-MOD-REM4	FIDN-MOD-REM8
KVM Console Side Fiber Extender - Universal Video	Extender Copper CAT6 USB Transmitter and Receiver	SKVM/SKM Remote Control, 2-Port	SKVM/SKM Remote Control, 4-Port	SKVM/SKM Remote Control, 8-Port
FIDN-MOD-REXT-4	FIDN-WSMOUNT	FIDN-KVM-MOUNT	FIDN005U	FIDN008U
Remote Control Extension Cable, 4 ft. (1.2m)	Work Surface Mount for SKVM/SKM	Under-Desk Mount	CAC Reader	CAC Reader
Universal 2nd Gen SKVM Replacement Parts				
0401-00853				
Universal 2- and 4-Port SKVM/SKM Power Adapter 12V 2.5A, w/Interchangeable Mains Connector Wall Mount				

Cables Modular SKVMs

Host Single-Head Cables for Modular SKVM					
Part Number	FIDN1MOD-HC-H06	FIDN1MOD-HC-P06	FIDN1MOD-HC-D06	FIDN1MOD-HC-V06	FIDN1MOD-HC-M06
Description	Modular HDMI Single-Head Host Cable, 6 ft. (1.8m)	Modular DP Single-Head Host Cable, 6 ft. (1.8m)	Modular DVI Single-Head Host Cable, 6 ft. (1.8m)	Modular VGA w/Audio Single-Head Host Cable, 6 ft. (1.8m)	Modular Mini DP Single-Head Host Cable, 6 ft. (1.8m)
Part Number	FIDN-MOD-EXH-04	FIDN2MOD-HC-U03			
Description	Modular Dual- or Single-Head Host Extension Cable, 4 ft. (1.2m)	Modular USB-C Dual- or Single-Head Host Cable, 3 ft. (0.9 m)			

Host Dual-Head Cables for Modular SKVM					
Part Number	FIDN2MOD-HC-H06	FIDN2MOD-HC-P06	FIDN2MOD-HC-P01	FIDN2MOD-HC-D06	FIDN2MOD-HC-V06
Description	Modular HDMI Dual-Head Host Cable, 6 ft. (1.8m)	Modular DP Dual-Head Host Cable, 6 ft. (1.8m)	Modular DP Dual-Head Host Cable, 1 ft. (0.3m)	Modular DVI Dual-Head Host Cable, 6 ft. (1.8m)	Modular VGA w/Audio Dual-Head Host Cable, 6 ft. (1.8m)
Part Number	FIDN2MOD-HC-M06	FIDN2MOD-HC-U03	FIDN2MOD-HC-HP6	FIDN2MOD-HC-DP6	FIDN2MOD-HC-S06
Description	Modular Mini DP Dual-Head Host Cable, 6 ft. (1.8m)	Modular USB-C Dual- or Single-Head Host Cable, 3 ft. (0.9m)	Modular HDMI and DP Dual-Head Host Cable, 6 ft. (1.8m)	Modular DVI and DP Dual-Head Host Cable, 6 ft. (1.8m)	Modular DPMST Dual-Head Host Cable, 6 ft. (1.8m)
Part Number	FIDN-MOD-EXH-04				
Description	Modular Dual- or Single-Head Host Extension Cable, 4 ft. (1.2m)				

Console Single-Head Cables for Modular SKVM					
Part Number	FIDN1MOD-CC-H06	FIDN1MOD-CC-P06	FIDN1MOD-CC-D06	FIDN1MOD-CC-V06	FIDN-MOD-EXC-04
Description	Modular HDMI Single-Head Console Cable, 6 ft. (1.8m)	Modular DP Single-Head Console Cable, 6 ft. (1.8m)	Modular DVI Single-Head Console Cable, 6 ft. (1.8m)	Modular VGA w/Audio Single-Head Console Cable, 6 ft. (1.8m)	Modular Dual- or Single-Head Console Extension Cable, 4 ft. (1.2m)
Part Number	FIDN1MOD-CC-H03	FIDN1MOD-CC-P03	FIDN1MOD-CC-D03		
Description	Modular HDMI Single-Head Console Cable, 3 ft. (0.9m)	Modular DP Single-Head Console Cable, 3 ft. (0.9m)	Modular DVI Single Head Console Cable, 3 ft. (0.9m)		

Console Dual-Head Cables for Modular SKVM					
Part Number	FIDN2MOD-CC-H06	FIDN2MOD-CC-P06	FIDN2MOD-CC-D06	FIDN2MOD-CC-V06	FIDN-MOD-EXC-04
Description	Modular HDMI Dual-Head Console Cable, 6 ft. (1.8m)	Modular DP Dual-Head Console Cable, 6 ft. (1.8m)	Modular DVI Dual-Head Console Cable, 6 ft. (1.8m)	Modular VGA w/Audio Dual-Head Console Cable, 6 ft. (1.8m)	Modular Dual- or Single-Head Console Extension Cable, 4 ft. (1.2m)
Part Number	FIDN2MOD-CC-H03	FIDN2MOD-CC-P03	FIDN2MOD-CC-D03		
Description	Modular HDMI Dual-Head Console Cable, 3 ft. (0.9m)	Modular DP Dual-Head Console Cable, 3 ft. (0.9m)	Modular DVI Dual-Head Console, 3 ft. (0.9m)		

Cables Universal 2nd Gen SKVMs

Single-Output PC								
SKVM PC Connection Combo	DP to DP	DP to DP	mDP to DP	mDP to DP	HDMI to HDMI	HDMI to HDMI	DVI to HDMI	USB-C to DP
Part Number	FIDN9019b06t	FID9019b10t	FIDN1CCBL-MP6t	FIDN1CCBL-MP10t	FIDN1CCBL-HH6t	FIDN1CCBL-HH10t	FIDN1CCBL-DH6t	FIDN1CCBL-CPN6t
Description	TAA DP/USB/AUD SKVM Cable, DP M/M; USB A/B, 6 ft. (1.8m)	TAA DP/USB/AUD SKVM Cable, DP M/M; USB A/B, 10 ft. (3m)	TAA MDP to DP/USB/AUD Cable, VID M/M; USB A/B, 6 ft. (1.8m)	TAA MDP to DP/USB/AUD Cable, DP M/MDP M; USB A/B, 10 ft. (3m)	TAA HDMI/USB/AUD Cable, HDMI M/M; USB A/B, 6 ft. (1.8m)	TAA HDMI/USB/AUD Cable, HDMI M/M; USB A/B, 10 ft. (3m)	TAA DVI to HDMI/USB/AUD Cable, VID M/M; USB A/B, 6 ft. (1.8m)	TAA Dock USB-C to DP/USB-B Cables w/RJ45/Power, 9 ft. (2.7m)
SKVM PC Connection Combo	DVI to HDMI	VGA to HDMI						
Part Number	FIDN1CCBL-DH10t	FIDN1CCBL-VH-10						
Description	TAA DVI to HDMI/USB/AUD Cable, VID MM; USB A/B, 10 ft. (3m)	VGA to HDMI/USB/AUD Cable VGA/HDMI MM, USB A/B, 10 ft. (3m)						

Dual-Output PC								
SKVM PC Connection Combo	DP to DP	DP to DP	mDP to DP	mDP to DP	HDMI to HDMI and DP to DP	HDMI to HDMI and DP to DP	HDMI to HDMI and DP to DP	DVI to HDMI and DP to DP
Part Number	FID9020b06t	FID9020b10t	FIDN2CCBL-MP6t	FIDN2CCBL-MP10t	FIDN2CC-HHPP1t	FIDN2CC-HHPP6t	FIDN2CC-HHPP10t	FIDN2CC-DHPP6t
Description	TAA Dual DP/USB/AUD SKVM Cable, DP M/M; USB A/B, 6 ft. (1.8m)	TAA Dual DP/USB/AUD SKVM Cable, DP M/M; USB-A/-B, 10 ft. (3m)	TAA (2) MDP to DP/USB/AUD Cable, VID M/M; USB-A/-B, 6 ft. (1.8m)	TAA (2) MDP to DP/USB/AUD Cable, VID M/M; USB-A/-B, 10 ft. (3m)	TAA (1) HDMI-HDMI (1) DP-DP/USB/AU Cable, 1 ft. (0.3m)	TAA (1) HDMI-HDMI (1) DP-DP/USB/AU Cable, 6 ft. (1.8m)	TAA (1) HDMI-HDMI (1) DP-DP/USB/AU Cable, 10 ft. (3m)	TAA (1) DVI to HDMI (1) DP to DP/USB/AUD Cable, 6 ft. (1.8m)
SKVM PC Connection Combo	DVI to HDMI	HDMI to HDMI	HDMI to HDMI	DVI to HDMI	DVI to HDMI	USB-C to DP		
Part Number	FIDN2CC-DHPP10t	FIDN2CCBL-HH6t	FIDN2CCBL-HH10t	FIDN2CCBL-DH6t	FIDN2CCBL-DH10t	FIDN2CCBL-CPN6t		
Description	TAA (1) DVI to HDMI (1) DP to DP/USB/AUD Cable, 10 ft. (3m)	TAA Dual HDMI/USB/AUD Cable, HDMI M/M; USB-A/-B, 6 ft. (1.8m)	TAA Dual HDMI/USB/AUD Cable, HDMI M/M; USB A/B, 10 ft. (3m)	TAA (2) DVI to HDMI/USB/AUD Cable, VD MM; USB A/B, 6 ft. (1.8m)	TAA (2) DVI to HDMI/USB/AUD Cable, VD MM; USB A/B, 10 ft. (3m)	TAA Dock USB-C to (2) DP/USB-B Cables w/ RJ45/power, 9 ft. (2.7m)		

Video Cables								
SKVM to Monitor Video Cables	DP to DP	DP to DP	mDP to DP	mDP to DP	HDMI to HDMI	HDMI to HDMI	DVI to HDMI	DVI to HDMI
Part Number	FIDN1VCBL-PP6t	FIDN1VCBL-PP10t	FIDN1VCBL-MP6t	FIDN1VCBL-MP10t	FIDN1VCBL-HH6t	FIDN1VCBL-HH10t	FIDN1VCBL-DH6t	FIDN1VCBL-DH10t
Description	TAA DP/DP Video Cable, DP M/M; 6 ft. (1.8m)	TAA DP/DP Video Cable, DP M/M; 10 ft. (3m)	TAA MDP/DP Video Cable, mDP M/DP M; 6 ft. (1.8m)	TAA MDP/DP Video Cable, mDP M/DP M; 10 ft. (3m)	TAA HDMI/HDMI SKVM Video Cable, HDMI M/M; 6 ft. (1.8m)	TAA HDMI/HDMI SKVM Video Cable, HDMI M/M; 10 ft. (3m)	TAA HDMI/DVI SKVM Video Cable, HDMI M/DVI M; 6 ft. (1.8m)	TAA HDMI/DVI SKVM Video Cable, HDMI M/DVI M; 10 ft. (3m)

Accessory Cables					
Other Cables/Adapters	CAC	CAC	USB/Audio	USB/Audio	DCU
Part Number	FID9013b06t	FID9013b10t	FID9022b06t	FID9022b10t	FID9026-50
Description	TAA USB-A to USB-B Cable for CAC Reader, 6 ft. (1.8m)	TAA USB-A to USB-B Cable for CAC Reader, 10 ft. (3m)	TAA USB Keyboard/Mouse/Audio Combo Cable, 6 ft. (1.8m)	TAA USB Keyboard/Mouse/Audio Combo Cable, 10 ft. (3m)	RJ25 Extension for DCU, 50 ft. (15.24m)

The Belkin Difference:



USA-based product support.



Hassle-free replacement.



3-year warranty with optional extension of 1-2 years.



Exclusively produced in the USA with TAA-compliant accessories.

Belkin International, Inc.

555 S Aviation Blvd, Suite 180
El Segundo, CA 90245-4852 USA
(310) 751-5569
belkin.com/cybersecurity

Support

Secure SKVM/SKM Support 800-282-2355

Sales

FederalBusinessDivision@belkin.com

Who we are.

At Belkin International, we create products that help people realize the power of technology and make people's lives better, easier and more fulfilling. This has been Belkin's mission since our inception in 1983. As a leading provider of SKVM switches for mission-critical applications, we positively impact and improve worker efficiency by delivering innovation and peace of mind to users working across multiple security enclaves. Our offer is certified to the latest Common Criteria NIAP Protection Profile for Peripheral Sharing Devices version 4.0 along with all applicable modules.

LinkedIn:



Brochure to download:

