

nGenius 6010 Packet Flow Switch

Redefining the Economics of the Data Center with Density, Scale, and Cost-Effective Performance

HIGHLIGHTS

- 15 Rackmount Unit chassis with highly available, hot-swappable architecture
- 6.0 Tbps throughput and non-blocking switching fabric
- Up to 10 hot-swappable blades
- Up to 600 non-blocking ports of 10GE per chassis
- Up to 150 non-blocking ports of 40GE per chassis
- Up to 60 non-blocking ports of 100GE per chassis
- Line rate performance on all features, including rate conversion, aggregation, replication, filtering, load balancing, port tagging, time stamping, de-duplication, protocol stripping and / or de-encapsulation, and conditional masking and slicing
- IP Tunnel termination (e.g. ERSPAN, NVGRE)
- Active inline traffic forwarding for active security or WAN optimization
- Intelligent fully meshed stacking / interconnect (pfsMesh)
- Management via command line, NETCONF, and graphical user interfaces for local and remote access
- Designed for NEBS III Compliance

Product Description

The nGenius® 6000 series packet flow switch (PFS) is a large-scale, high-performance, high-density blade and chassis system that bridges the gap between 1G, 10G, 40G, and 100G Ethernet networks and tools.

The nGenius 6010 packet flow switch model is designed for NEBS level III compliance, and consists of a 15RU chassis that supports up to ten line cards, with each line card supporting up to 600 Gbps throughput – for a chassis total throughput of 6 Tbps and up to 600 ports. All ports on each line card are enabled by default, with each port configurable as an input port, intermediate (service) port, or output port.

With the NETSCOUT® pfsMesh, a self-organizing architecture, traffic capture devices can be deployed in a redundant, low-latency meshed architecture for dynamic and fault-tolerant visibility that can scale to over 4000¹ ports across LAN and WAN environments.

Delivery Optimization

Beyond large scale aggregation and speed conversion, nGenius 6010 packet flow switch supports line rate hardware-based packet filtering and session-based load balancing of packets to tools.

Hardware-based, user-independent filtering allows traffic to be distinguished according to source and/or destination MAC address, VLAN inner/outer ID, IP address, SCTP/TCP/UDP port, as well as by specific protocols, such as HTTP, VoIP (SIP, RTP), and others. A custom filter enables more granular specification, specifically within the payload of a packet. Filters can be ingress, egress, and overlapping.

Flow-aware load balancing provides control of traffic distribution to monitoring tools, increasing output capacity while maintaining session integrity. For example, a 100G network can be captured and automatically balanced across multiple 10G monitoring tool ports based on user-defined session criteria. Flow-aware load balancing can operate in tandem with hardware-based filtering or independently.

¹ Total number of ports in a single pfsMesh is dependent on quantity and complexity of filtering.



36S6Qstd Line Card		36 x 1Gb/10Gb SFP+ Ports & 6 x 40Gb QSFP+ Ports
15Qstd Line Card		15 x 40Gb QSFP+ Ports
6Cstd Line Card		6 x 100Gb CFP2 Ports
6Q28std Line Card		6 x 100Gb QSFP28 Ports
40Sadv Line Card		40 x 1Gb/10Gb SFP+ Advanced Ports and Advanced feature packages



Security Optimization

To take action as offenders and bad actors are detected, the active inline security tools need to see and handle all the traffic that needs to be inspected.

nGenius packet flow switches with inline tool chaining allow aggregation, filtering, and load-balancing of actual network traffic toward multiple inline security applications whilst maintaining only a single intrusion into each network link, and provide application-specific health checks (not just heartbeats) to ensure the active security tools are connected and functioning properly. External bypass TAPs can be used to ensure that the security policies are adhered to during power failure.

Management

nGenius 6010 packet flow switch can be locally managed via a serial console and remotely managed via a Web GUI, CLI, and NETCONF XML API using HTTP, HTTPS, SSH, or Telnet. The system can be monitored via Syslog and SNMP.

The devices support field software updates for maintenance and feature or performance enhancements. nGenius 6010 packet flow switch can be centrally managed and configured.

nGenius 6010 packet flow switch also provides automated event driven monitor output traffic direction and responses (Syslog messages, SNMP traps, light front LED, deactivate ports).

Virtual Access

For accessing traffic that is completely virtualized and never makes it onto a physical network, traffic can be mirrored and forwarded from the virtual network to the physical network using tunneling protocols such as NVGRE (L2GRE) or ERSPAN, which encapsulate the traffic of interest. The nGenius 6010 packet flow switch can be the destination of these tunnels and terminate the tunnel, and the traffic can then be forwarded on to monitoring applications either as is or de-encapsulated.

Power and Compliance

Designed for NEBS III compliance, nGenius 6010 packet flow switch supports hot-swappable power entry, fans, air filters, and line cards. Redundant power allows seamless transitions between power systems to ensure uptime. The fabric and management planes also have redundancy for carrier-grade high availability.

Features and Benefits

Features	Benefits
<p>Up to 600 line-rate ports in 15RU</p> <ul style="list-style-type: none"> • 360 x 1G/10G • 600 x 10G • 150 x 40G • 60 x 100G • Mix of 1G/10G/40G/100G <p>Compatible with SFP, SFP+, QSFP+, QSFP28, QSFP28, and CFP2 MSA compliant transceivers including direct attach copper (up to 3m) and active fiber cables</p>	<p>High density system:</p> <ul style="list-style-type: none"> • Reduces per-port cost and increases flexibility • Condenses the nGenius PFS footprint (rack space) • Reduces power consumption • Simplifies management
<p>I/O configurable</p> <ul style="list-style-type: none"> • Full flexibility in selecting ports for network access, intermediate service, interconnect, or monitor output • Dual network access & monitor output port class • IP tunnel (e.g. ERSPAN, GRE, NVGRE/L2GRE) termination 	<ul style="list-style-type: none"> • Enables agile response to monitoring infrastructure changes • Facilitates effectively doubled capacity for input and output • Allows virtualized traffic to be forwarded over an IP network to PFS ingress ports, and then forwarded onto monitoring devices as is, or de-encapsulated²
<p>Selective Aggregation</p> <ul style="list-style-type: none"> • Fully flexible any-to-any port mapping 	<ul style="list-style-type: none"> • Enables large scale aggregation to maximize tool visibility • Addresses asymmetrical routing issues
<p>Hardware-based Filtering</p> <ul style="list-style-type: none"> • User-independent • OSI Layers 2 - 7 • Custom offset (user-defined) • Ingress • Egress • Overlapping 	<ul style="list-style-type: none"> • Allows only "traffic of interest" to be forwarded to each tool, which increases tool efficiency and reduces the number of required tool interfaces
<p>Session-based/flow-aware load balancing</p> <ul style="list-style-type: none"> • Distributes traffic load across multiple instances of a tool or tool port • Maintains session stickiness for full conversations • Up to 64 ports per group 	<ul style="list-style-type: none"> • Prevents oversubscription of monitoring tools and security systems – eliminating blind spots without sacrificing session integrity • 40G and 100G copied traffic can be easily distributed across multiple lower speed tool ports, allowing users to preserve existing tool investments
<p>Monitor traffic port tagging</p> <ul style="list-style-type: none"> • Provides identification of traffic based on source network/link using • VLAN tagging, or • Port stamping 	<ul style="list-style-type: none"> • Users can quickly and precisely pinpoint where an issue, such as latency or security event, is occurring in the network. • Provides options for different tools to access port identification
<p>Intelligent Stacking (pStack)</p> <ul style="list-style-type: none"> • Enables pfsMesh architecture for local and remote of up to 256³ PFS devices as a single redundant system 	<ul style="list-style-type: none"> • Ensures highly available monitoring • Scales visibility with network infrastructure and new tools • Ensures delivery of traffic across LAN or WAN to tools
<p>Microburst mitigation</p> <ul style="list-style-type: none"> • High Data Burst Buffering 	<ul style="list-style-type: none"> • Prevents packet loss resulting from aggregation or speed conversion of bursty traffic (microbursts)

² Requires Advanced line card.


³ Total number of packet flow switches in a single pfsMesh is dependent on device sizes, number of ports, and complexity of filtering.

Features	Benefits
<p>Hardware-based Advanced Packet Optimization</p> <ul style="list-style-type: none"> Accurate time stamping (from 4ns) for latency analysis; supports GPS, PTP, 1PPS, and NTP for accurate timing synchronization Protocol header removal (stripping and de-encapsulation) for broader tool support; supports removal of ERSPAN, Fabric Path, GRE, GTP, MAC-in-MAC, MPLS, NVGRE, TRILL, VLAN, VN-tag, & VXLAN protocol headers, as well as almost any other protocol used for tunneling in networks Balancing of tunneled traffic; supports removal of ERSPAN, Fabric Path, GRE, GTP, MAC-in-MAC, MPLS, NVGRE, TRILL, VLAN, VN-tag, & VXLAN protocol headers, as well as almost any other protocol used for tunneling in networks Conditional packet masking for selective payload obfuscation; supports masking from anywhere up to 9000 bytes into the packet Conditional packet masking for selective payload obfuscation; supports data masking from anywhere up to 4000 bytes into the packet Adaptive load-balancing on inner L2-L4 headers of tagged/encapsulated traffic; supports ERSPAN, Fabric Path, GRE, GTP, MAC-in-MAC, MPLS, NVGRE, TRILL, VLAN, VN-tag, & VXLAN protocol headers, as well as almost any other protocol used for tunneling in networks Deduplication at line-rate for removing duplicate packets; supports numerous packet comparison criteria and user-defined duplicate detection window up to 4 seconds 	<ul style="list-style-type: none"> Provides time-of-capture data Allows any and all tools to monitor the same network traffic Enables tools to perform faster, more effective analysis Facilitates regulatory data privacy compliance Ensures correct balancing and forwarding of all traffic types Reduces traffic volume to be backhauled to tools
<p>Intelligent Stacking (pStack)</p> <ul style="list-style-type: none"> Enables pMesh architecture for local and remote of up to 256⁴ PFS devices as a single redundant system Works over LAN and WAN connections 	<ul style="list-style-type: none"> Ensures highly available monitoring Scales visibility with network infrastructure and new tools Ensures delivery of traffic across LAN or WAN to tools
<p>Active inline access and forwarding</p> <ul style="list-style-type: none"> Aggregation of multiple network segments Filtering and load balancing towards applications/tools Easy to configure simple and complex inline tool chaining Customizable health check packets for “positive” (return) and “negative” (no return) checks 	<ul style="list-style-type: none"> Removes multiple points of failure Gains visibility for a single inline security tool (e.g. security proxy, IPS) and/or WAN optimization Easy deployment of layered security Removes multiple points of failure by fully exercising tools
<p>Local and remote management</p> <ul style="list-style-type: none"> XML API CLI (Telnet/SSH) GUI (HTTP/HTTPS) vMC (HTTP/HTTPS) SNMP (v1, v2, v3) Syslog 	<ul style="list-style-type: none"> Easy to use via graphical interfaces or via CLI for users already familiar with Cisco Easy integration with applications using CLI or NETCONF XML API Alerts can be received by any Syslog server or SNMP manager
<p>Role-based Access</p> <ul style="list-style-type: none"> Multiple user and user role support Flexible user/role defined privileges, unique screen views, and access control 	<ul style="list-style-type: none"> Conforms to security policy needs of IT organizations
<p>AAA security with Remote (RADIUS and/or TACACS+)</p>	<ul style="list-style-type: none"> Meets authentication policy needs of IT organizations and Local authentication
<p>Hot swappable line cards and fan tray</p>	<ul style="list-style-type: none"> Maintains high availability for 99.999% uptime (five-9s) or better Scales to meet changing needs
<p>Redundant fabric modules and management modules</p>	<ul style="list-style-type: none"> Maintains high availability for 99.999% uptime (five-9s) or better
<p>Redundant, universal power feed units</p> <ul style="list-style-type: none"> AC and DC hot-swappable options 	<ul style="list-style-type: none"> Maintains high availability for 99.999% uptime (five-9s) or better
<p>Traffic Statistics</p> <ul style="list-style-type: none"> Port-level packet and throughput metrics, including overflow drops, bad packets, etc. Flow level packet and throughput metrics 	<ul style="list-style-type: none"> Visibility into network and tool port activity Visibility into traffic type activity

⁴ Total number of packet flow switches in a single pMesh is dependent on device sizes, number of ports, and complexity of filtering.

nGenius 6010 Packet Flow Switch Components

Chassis and Blades

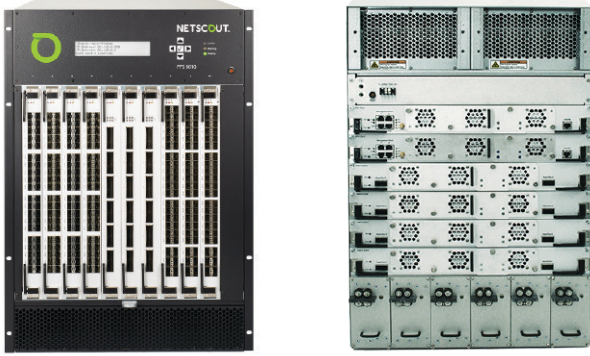

Base Chassis

Base 10-slot PFS 6010 chassis, including

- 2 x Management module (1:1 redundant) with:
 - 2 x Management port
 - 1 x Serial console port
 - 1 x GPS port
 - 1 x PTP port
 - 1 x 1PPS port
- 4 x Fabric module (3:1 redundant)
- 6 x DC Power entry unit (3:3 redundant)
- 2 x Fan tray (1:1 redundant)
- 1 x Alarm panel with alarm relay block



36S6Qstd Line Card

36 x 10G/1G SFP+ and 6 x 40G QSFP+ standard edition line card for nGenius PFS 6000

- Allows up to 360 x 10G/1G and 60 x 40G ports, or 600 x 10G (using breakouts for 40G) ports with base feature set



15Qstd

15 x 40G QSFP+ standard edition line card for nGenius PFS 6000

- Allows up to 150 x 40G ports with base feature set



6Cstd Line Card

6 x 100G CFP2 standard edition line card for nGenius PFS 6000

- Allows up to 60 x 100G ports with base feature set



6Q28std Line Card

6 x 100G QSFP28 standard edition line card for nGenius PFS 6000

- Allows up to 60 x 100G ports with base feature set



40Sadv-R Line Card

40 x 10G/1G SFP+ Advanced edition line card for nGenius PFS 6000

- Allows up to 400 x 10G/1G ports with advanced and base feature sets



DC Power Entry Unit

-48V DC Power entry unit (included in base chassis)



AC Power Supply Shelf

100 to 240V, 50/60 Hz AC Power Supply option (external to chassis)

PRODUCT SPECIFICATIONS

Physical Characteristics

Component	Height	Width	Depth	Weight
Base Chassis	15 RU 26.2 in (666 mm)	17.7 in (450 mm)	25.8 in (656 mm)	168 lb (76.2 kg) 272 lb (123.4 kg) fully populated
36S6Qstd Line Card	16.5 in (419 mm)	1.5 in (38.2 mm)	17.5 in (445 mm)	9.3 lb (4.2 kg)
15Qstd Line Card	16.5 in (419 mm)	1.5 in (38.2 mm)	17.5 in (445 mm)	9.2 lb (4.2 kg)
6Cstd Line Cards	16.5 in (419 mm)	1.5 in (38.2 mm)	17.5 in (445 mm)	9.1 lb (4.1 kg)
6Q28std Line Card	16.5 in (419 mm)	1.5 in (38.2 mm)	17.5 in (445 mm)	9.1 lb (4.1 kg)
40Sadv-R Line Card	16.5 in (419 mm)	1.5 in (38.2 mm)	17.5 in (445 mm)	10.4 lb (4.7 kg)
Fabric Module	2.2 in (55 mm)	17.5 in (445 mm)	10.8 in (274 mm)	5.7 lb (2.6 kg)
Management Module	2.2 in (55 mm)	17.5 in (445 mm)	10.6 in (270 mm)	4.5 lb (2.0 kg)
DC Power Entry Unit	5.5 in (141 mm)	2.9 in (73 mm)	8.9 in (227 mm)	5.3 lb (2.4 kg)
AC Power Shelf	1.72 in (43.7 mm)	15.8 in (401 mm)	17.5 in (445 mm)	29.5 lb (13.4 kg)

Power Specification

Component	Specifications
Base Chassis	-48 V DC, 30.0 A, 1200 W max (4,095 BTU), empty chassis; 6000 W absolute max (20,475 BTU), full chassis (future expansion)Operates with input voltages of -48 V DC and -60 V DC.
36S6Qstd Line Card	200 W typical, 300 W max (1,024 BTU)
15Qstd Line Card	220W typical, 320 W max (1,092 BTU)
6Cstd / 6Q28std Line Cards	240 W typical, 340 W max (1,160 BTU)
6Q28std Line Card	230 W typical, 330 W max (1,126 BTU)
40Sadv-R Line Card	330 W typical, 430 W max (1,467 BTU)
DC Power Entry Unit	-48 V DC in/out, 60.0 A, 2400 or 2000 W (depending on DC segment)
AC Power Shelf (per module)	100 to 132 V AC, 19.2 A, 1500 W / 180 to 240 V AC, 11.1 A, 2000 W Note: - For 3:1 redundancy, the AC power shelf handles up to 6000 W for input range 180 to 264 V AC. - For input range 85 to 132 V AC, the 3:1 redundancy is not supported - AC to DC conversion efficiency is approximately 87%

Environmental Specification

Operating Temperature	32° to 113°F (0° to 45°C)
Storage Temperature	-4° to 212°F (-20° to 100°C)
Operating Humidity	20% - 80% (non-condensing)
Storage Humidity	5% - 95%, (non-condensing)

Electrical and Optical Characteristics

Aspect	
Data Rates	1Gbps, 10Gbps, 40Gbps, 100Gbps
Interface Types	Ethernet: 1000 Base-T, 1000 Base-SX, 1000 Base-LX, 1000 Base-ZX, 10G Base-T, 10G Base-LR, 10G Base-ER, 10G Base-ZR, 10G Base-SR, 10G Laserwire, 40G Base-SR4, 40G Base-LR4, 40G Base-ER4, Cisco 40G Base-SR2 BiDi, 40G Quadwire FDR, 100Gbase-SR4, 100Gbase-LR4, 100Gbase-SR10, 100Gbase-ER4
Propagation Delay	< 1.6µs across each 20-port group, < 3.2µs across 20-port groups and across cards

Standards and Compliance

Standard	Specification(s)
Ethernet	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3ae, IEEE 802.3z
VLAN	IEEE 802.1Q, IEEE 802.1ad
ARP	IETF RFC 826
IP	IETF RFC 791, 2460
UDP	IETF RFC 768
TCP	IETF RFC 793
FTP	IETF RFC 959, 2228
Telnet	IETF RFC 854
SSH	IETF RFC 4251, 4252, 4253
HTTP	IETF RFC 2616, 2817
TLS (SSL)	IETF RFC 4492, 5246
SNMP	IETF RFC 1157, 3411-3418
Syslog	IETF RFC 5424

Standard	Specification(s)
RADIUS	IETF RFC 2865, 2866
TACACS+	IETF RFC 1492
NTP	IETF RFC 5905
PTP	IEEE 1588-2008
EMC	FCC Part 15 Class A, VCCI Class A, EN55022/CISPR-22 Class A, AS/NZS CISPR-22 Class A, CE Mark EN 55022 Class A, ETSI EN300 386 V1.3.2, EN61000-4-2, EN 61000-4-3, 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-3-2
Safety	UL 60950-1, CSA C22.2 EN 60950-1, IEC-60950-1
NEBS Level 3	GR-63, GR-1089
RoHS	RoHS 6, EU directive 2002/95/EC
REACH	EC 1907/2006, 121/2006

MORE INFORMATION OR QUESTIONS

For more information or any questions, about NETSCOUT Systems or its products, please contact your local representative, call +1 800-309-4804 or +1 978-614-4000, or go to www.netscout.com.

Ordering Information

Part Numbers	Description
6010ND000000	nGenius 6000 Series Packet Flow Switch - 6010 chassis (10-slot), DC power
6010NDAHD200	nGenius 6000 Series Packet Flow Switch - 6010 chassis, 36S6Qstd line card: 72x 10G/1G SFP+, 12x 40G QSFP+ ports, DC power
6000NBFA100	6000 Series - 36S6Qstd Line Card with 36 x 1Gb/10Gb Ports & 6 x 40Gb Ports
6000NBFK4100	6000 Series - 15Qstd Line Card with 15 x 40Gb Ports
6000NBBGB100	6000 Series - 6Cstd Line Card with 6 x 100Gb CFP2 Ports
6000NBBGE100	6000 Series - 6Q28std Line Card with 6 x 100Gb QSFP28 Ports
6000NBCJ2L0A	6000 Series - 40Sadv Line Card with 40 x 1Gb/10Gb Ports and 3x Advanced feature packages
321-1968	Kit, AC to DC Power Conversion Shelf, nGenius 6010 PFS

For transceivers, please refer to list of SFP, SFP+, QSFP+, QSFP28, and CFP2 transceivers offered by NETSCOUT Systems.



Corporate Headquarters
NETSCOUT Systems, Inc.
Westford, MA 01886-4105
Phone: +1 978-614-4000
www.netscout.com

Sales Information
Toll Free US: 800-309-4804
(International numbers below)

Product Support
Toll Free US: 888-357-7667
(International numbers below)

NETSCOUT offers sales, support, and services in over 32 countries. Global addresses, and international numbers are listed on the NETSCOUT website at: www.netscout.com/company/contact-us